



FILTRATION



DRAINAGE

**WINFAB** manufactures fabrics designed to meet today's advanced engineering requirements for stabilization, separation, filtration, reinforcement, and erosion control.

## DESCRIPTION

**WINFAB® DWB8** and **WINFAB® DWB10** Dewatering Bags have been designed to assist contractors and site engineers with dewatering of construction sites, lakes, and other water pumping applications. As water is pumped into the dewatering bag, sediment, silt, and sand is trapped inside. The water that was pumped into the bag is released through the dewatering bags' filtering material as near-clear water.

Additionally, WINFAB Dewatering Bags help protect the environment & comply with stormwater regulations by reducing pollutants and helping to maintain ground water quality.

WINFAB Dewatering Bags are manufactured using a nonwoven polypropylene geotextile stitched together via a double-needle seam. A fabric flange is also incorporated allowing a discharge hose of up to 6" to be attached.

## AVAILABLE SIZES

WINFAB Dewatering Bags are available in the following sizes: 5' x 6', 7.5' x 15', 10' x 15', 15' x 15'. For custom sizing or to place an order, please call 912.534.5757

## APPLICATIONS

WINFAB Dewatering Bags bring a cost-effective solution to the following processes:

- Stormwater filtering
- Dewatering of ponds & lakes
- Construction on highways and building foundations
- Trench draining & water removal from low-lying areas
- Golf Course pond cleaning
- Water or Sewage line repair

## INSTALLATION

- Place **WINFAB® DWB8** and **WINFAB® DWB10** Dewatering Bags on a fairly level and stabilized area.
- Insert the pump discharge hose into the fabric flange and secure it tightly with the flange straps.
- Once the pump is operational, make sure that no unfiltered water is escaping from around the fabric flange.
- WINFAB Dewatering bags are designed for one-time use. Once the dewatering bag is full, the bag must be cut open and the waste can then be disposed of or reused on-location. Be sure to follow any local regulations regarding disposal.





FILTRATION



DRAINAGE



**WINFAB® DWB8** and **WINFAB® DWB10** are created using needlepunched nonwoven geotextiles manufactured using polypropylene fibers that are formed into a dimensionally stable network, allowing the fibers to maintain their relative position. **WINFAB® DWB8** and **WINFAB® DWB10** resist ultraviolet deterioration, rotting, and biological degradation & are inert to commonly encountered soil chemicals.

| PROPERTY                     | TEST METHOD | DWB8<br>MARV English / Metric                 | DWB10<br>MARV English / Metric                |
|------------------------------|-------------|---|---|
| Tensile Strength (Grab)      | ASTM D-4632 | 205 x 205 lbs<br>/ 912 x 912 N                | 250 x 250 lbs<br>/ 1113 x 1113 N              |
| Elongation                   | ASTM D-4632 | 50% / 50%                                     | 50% / 50%                                     |
| CBR Puncture                 | ASTM D-6241 | 525 lbs / 2336 N                              | 625 lbs / 2781 N                              |
| Trapezoidal Tear             | ASTM D-4533 | 80 x 80 lbs / 356 x 356 N                     | 100 x 100 lbs / 445 x 445 N                   |
| UV Resistance (500 hrs)      | ASTM D-4355 | 70% / 70%                                     | 70% / 70%                                     |
| Apparent Opening Size (AOS)* | ASTM D-4751 | 80 US Std. Sieve / 0.18 mm                    | 100 US Std. Sieve / 0.150 mm                  |
| Permittivity                 | ASTM D-4491 | 1.4 sec <sup>-1</sup> / 1.4 sec <sup>-1</sup> | 1.2 sec <sup>-1</sup> / 1.2 sec <sup>-1</sup> |
| Water Flow Rate              | ASTM D-4491 | 90 gpm/ft <sup>2</sup> / 3667 lpm/m           | 80 gpm/ft <sup>2</sup> / 3251 lpm/m           |

\*Maximum Average Roll Value

**Notes:**

- Mullen Burst ASTM D-3786 has been removed. It is not recognized by ASTM D-35 on Geosynthetics.
- Puncture ASTM D-4833 has been removed. It is not recognized by AASHTO M288 and has been replaced with CBR Puncture ASTM D-6241

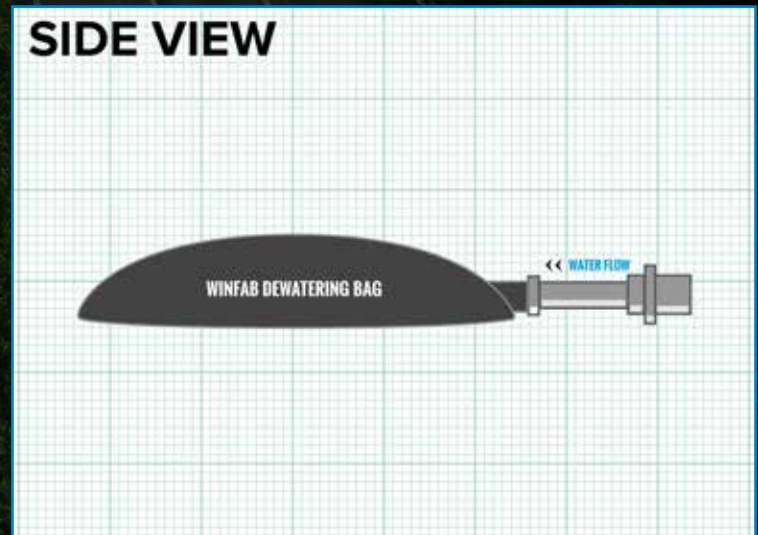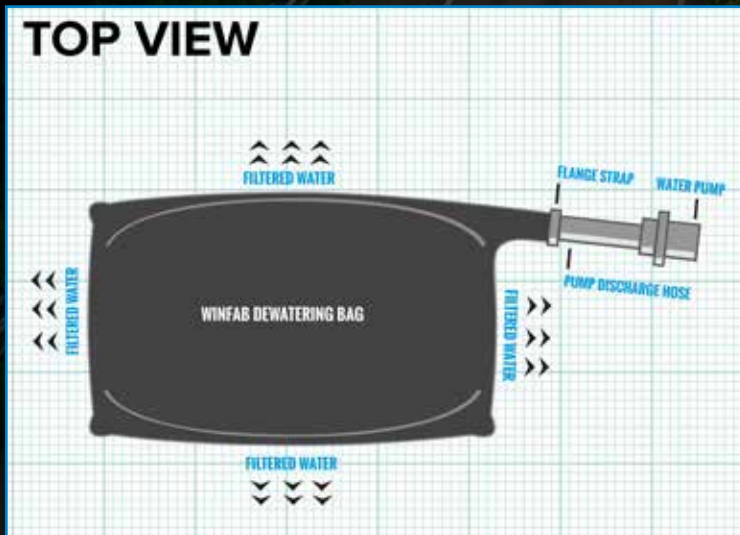

Disclaimer: WINFAB assumes no liability for the completeness or accuracy of this information or the ultimate use of this information. WINFAB disclaims any and all implied, expressed, or statutory standards, guarantees, or warranties. This includes without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Always consult the project engineer for project specific requirements. The end user assumes sole responsibility for the use of this information and product. The property values listed above are subject to change without notice.

WINFAB® & are trademarks of Willacoochee Industrial Fabrics, Inc.

©2021 Willacoochee Industrial Fabrics Inc.